Bernecker
Rohrbefestigungstechnik GmbH

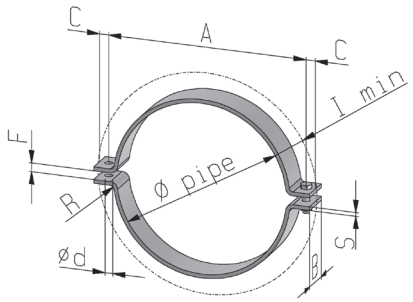

Pipe Clips Type RD

DN 15 - DN 400

For piping with thin isolation

Material:	**S235JR** DIN EN 10025-2, for temperatures up to **300°C**
Finish:	plain, choosing longer screws will effect screw locking,
	Bolts and nuts to DIN ISO 4017/ 4032 - 8.8 / 8 hot-dip galvanized (DIN EN ISO 898)

Ø pipe		B x S	A	C	F	lmin	R	d	bolt size „long“	**Article no.** Clips without bolts and nuts	weight [kg]	**Article no.** Clips with long bolts and nuts	weight incl. bolts [kg]
½“	21,3	40 x 5	62	15	10	35	7	12	M10 x 40	RD-022-R	0,29	RD-022-R-8FL	0,37
¾“	26,9	40 x 5	67	15	10	35	7	12	M10 x 40	RD-027-R	0,32	RD-027-R-8FL	0,40
1“	33,7	40 x 5	73	15	10	35	7	12	M10 x 40	RD-034-R	0,34	RD-034-R-8FL	0,42
1 ½“	48,3	40 x 5	89	15	10	35	7	12	M10 x 40	RD-049-R	0,41	RD-049-R-8FL	0,57
2“	60,3	40 x 5	104	15	10	35	7	12	M10 x 40	RD-061-R	0,48	RD-061-R-8FL	0,58
3“	88,9	40 x 5	130	15	10	35	7	12	M10 x 40	RD-089-R	0,60	RD-089-R-8FL	0,70
4“	114,3	40 x 5	156	15	11	35	7	12	M10 x 40	RD-115-R	0,73	RD-115-R-8FL	0,83
6“	168,3	50 x 6	214	15	11	35	9	12	M10 x 40	RD-169-R	1,49	RD-169-R-8FL	1,61
8“	219,1	50 x 6	264	15	11	35	9	12	M10 x 40	RD-220-R	1,87	RD-220-R-8FL	1,99
10“	273,0	50 x 6	318	15	14	35	9	12	M10 x 40	RD-273-R	2,25	RD-273-R-8FL	2,37
12“	323,9	60 x 8	380	18	14	40	12	14	M12 x 50	RD-324-R	4,26	RD-324-R-8FL	4,67
14“	355,6	60 x 8	412	18	14	40	12	14	M12 x 50	RD-356-R	4,66	RD-356-R-8FL	5,07
16“	406,4	60 x 8	462	18	18	40	12	14	M12 x 50	RD-407-R	5,22	RD-407-R-8FL	5,67

Notes: Other dimensions on request.

Errors and technical modifications reserved, images similar, Copyright © Bernecker 2018